



# LAMINATE & ACCESSORIES

**JTC**  
FURNITURE GROUP

## LAMINATE OVERVIEW

- 1 Laminate postformed on top and bottom front edges for added protection, conforms to EN438.
- 2 PU strip (100mm) for added protection against water ingress.
- 3 Impregnated Paper Backing.
- 4 Manufactured and Tested to BS EN 438.1.199, Laminate / Substrate adhesion conforms to BS 6222 Part 3, coreboard conforms to BS EN 312, Class E1 standard of <8 mg/100g for formaldehyde.
- 5 Single Postformed Rear Edges are sealed with hot melt adhesive.
- 6 38mm high 6mm Postformed Front Worktops.

Double-sided Postformed 900mm Breakfast Bars - 3m lengths

### MODERN POSTFORMED PROFILE

6mm Round Radius Top & Bottom


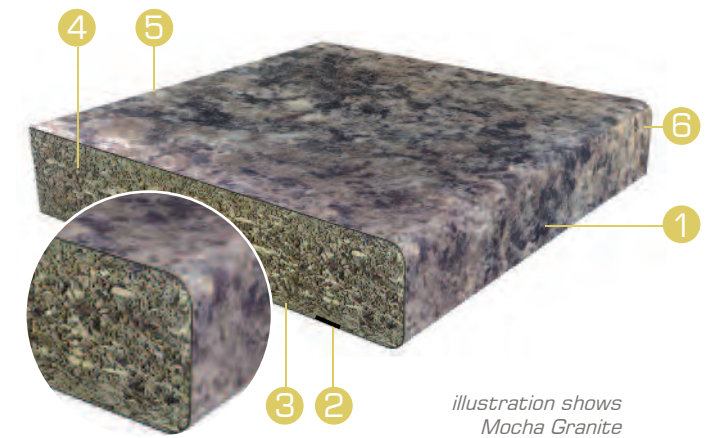


illustration shows Mocha Granite

### WORKSURFACES SPLASHBACKS & UPSTANDS

Complement your worksurface with laminate splashbacks and upstands. Designed to fit on the wall above kitchen worksurfaces & breakfast bars, the hygienic & seamless joints offer an alternative to ceramic tiles which can be time consuming to fit, grout & maintain.

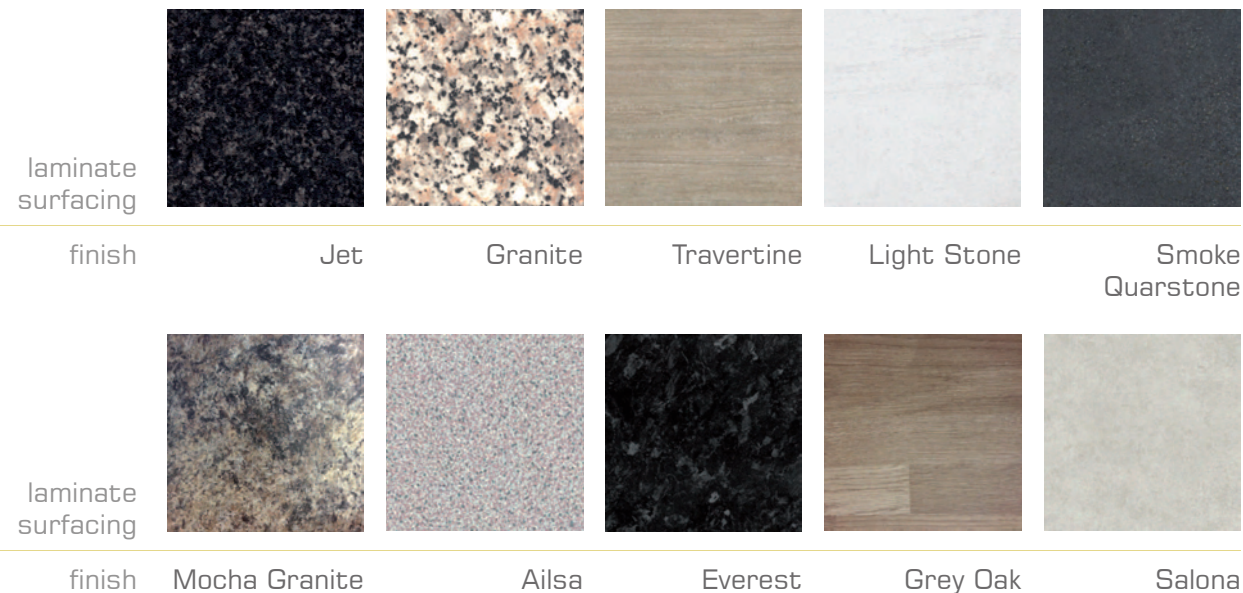

The colours, products and designs indicated in this brochure are for guidance only. Please ask for samples of actual product before specifying

### ADVANTAGES | SPLASHBACKS & UPSTANDS

- Fully Coordinated 100mm Upstands & Full Height Splashback
- Ideal for use in kitchens & bathrooms, matching worktops
- Practical lightweight alternative to tiling
- Simple to install, no tiler required
- Can be cut easily using ordinary woodworking tools
- Fast Installation, no wet trade required
- Held in place using adhesive and silicon sealant.
- Hygienic, easy to clean & maintain, grease easily wipes off
- No grout, no stains or mould, no need for regular maintenance
- Tight non-visible joint between Worktop & Upstand/Splashback
- Easy to clean joint between Worktop & Upstand/Splashback
- Tough and durable, with a modern appearance
- Prevents heat damage to walls
- Extend them to clad the entire wall
- Can be used in laundry / utility rooms
- Ideal for new or 'makeover' projects
- Can be used over existing tiling

### PERFORMANCE

All surfaces are manufactured and tested to BSEN438.1.1991, they are highly resistant to abrasion, high temperatures, impact and household stains, with a sealed front and rear edge to prevent moisture and steam penetration.

### QUALITY

Fully ISO9001 accredited.

### ENVIRONMENT

The wood based materials used in our products are all UK sourced, FSC accredited and manufactured to ISO14001 environmental standards to ensure high quality values of sustainability are maintained.

### DIMENSIONS

Worktop	3660mm x 600mm
Upstands	3000mm x 100mm
Splashbacks	3000mm x 485mm
Breakfast Bars	3000mm x 900mm

All 10 Worktops shown here are available throughout all of our Door Ranges.